



To learn about other Suncast products, please call 1-800-846-2345 or 1-630-879-2050.




Product Feedback? Go To: Suncastcommercial.com/feedback OR email us at: feedback@suncastcommercial.com

ITEM NUMBER: BMJB4824FLC

SAFETY INFORMATION

- Read and follow the instructions thoroughly prior to assembly. The manufacturer is not responsible for replacing parts lost or damaged due to incorrect assembly.
- This product is not a toy and is not intended for use by children.
- Repair or replace broken parts immediately.
- Do not sit or stand on the lid. Do not exceed the maximum lid weight of 200 pounds.
- Do not exceed the maximum box weight of 300 pounds.
- Exercise caution when moving the fully loaded product. A team lift is recommended.
- Lift only by tubular handles on both sides.
- Never use this product to store flammables, explosives, or hazardous materials.
- To avoid the risk of suffocation, never allow children to play inside the container.
- This product may become susceptible to impact damage in freezing temperatures.
- Do not store this product near excessive heat.
- This kit contains parts with metal edges. Please be careful when handling.
- This kit contains parts that can be damaged if assembled incorrectly or in the wrong sequence.
- DO NOT SUSPEND THE JOB BOX.




CARE AND CLEANING

- Use soap and water with a soft bristle brush to clean the product. DO NOT use bleach, ammonia, or caustic cleaners, as these will damage the finish.
- If power washing, keep the nozzle at least 18 in. away from the product.
- Locks, latches, and hinges should be lubricated regularly, and gas shocks wiped with a dry cloth to remove dust or dirt.
- Check screws and nuts monthly to make sure they are secure.

TOOLS REQUIRED AND PACKAGE CONTENTS

- Using the hardware included and package content lists, verify that you have all the parts required to assemble your product. If any part appears missing or damaged, do not assemble this product and call the Customer Service team at 1-800-846-2345 for assistance.

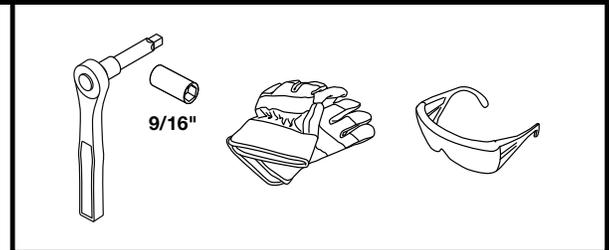


A x16




B x16



C x16



D x2




E x2

ASSEMBLY


1 Carefully flip job box over:

- Place on a smooth flat surface to avoid scratching.

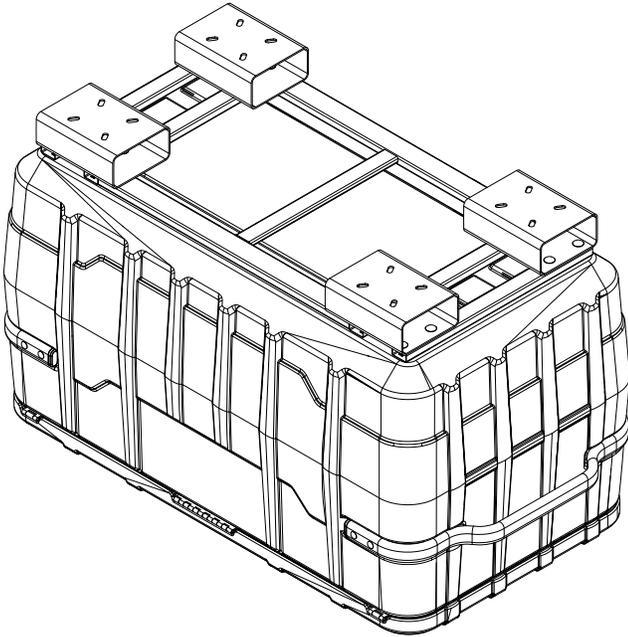

2 Attaching the casters:

- Place the casters (D/E) on the four corners of the frame. Align the casters (D/E) with screw holes. Two locking casters and two non-locking casters are provided. Placement of them is at user preference.
- Secure the casters (D/E) to the frame by placing bolts underneath frame, as shown, and securing with one washer (B) and one nut (A). Tighten nuts (A) with a socket wrench.

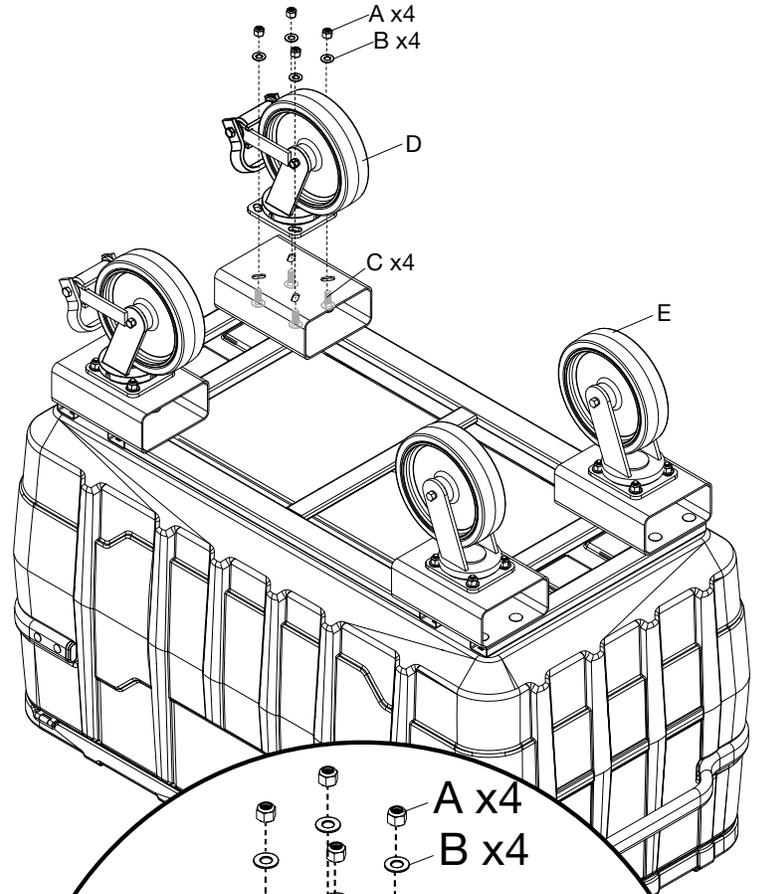

3 The recommended padlock for this job box is a shrouded disc lock.

- The lock should fit the dimensions pictured

